

## Overview

Chilled display units incorporating a cold well, the unique Moffat innovative "Polar Air Stream" system provides a constant wall of cold air which moves across the well blanketing the food displayed and recirculates back through the system. Holding pre-chilled food at a safe and regulated temperature. Retaining taste and freshness throughout, perfect for fruit and vegetables, salads, and cold drinks. Self-contained units with accurate digital control, automatic defrost, high pressure warning, and automatic condensate evaporation. Utilising a highly efficient, naturally occurring hermetically sealed hydrocarbon refrigeration gas type R290 reducing the carbon footprint and energy consumption.

The chilled well is designed to accommodate various type of dishes alternatively Gastronorm GN1/1 pans can be used.



## Key Features:

- 4 models in the range holding 2 to 5 GN 1/1 Gastronorm type containers.
- Mobile all swivel castors two with brakes
- Size 3, 4 & 5 have condensing unit set at 90° angle. Removes the need for unsightly vents in the front panels.
- Accommodates 60mm deep 1/1 GN pans [not supplied].
- Digital thermostat and temperature control with automatic defrost.
- Advanced air flow design with unique polar air stream technology.
- Fully insulated efficient, eco-friendly, refrigeration. 24 hour operation.
- Maintaining the core product temperature of pre-chilled food below 5°C in ambient condition not exceeding 25°C and 60% relative humidity
- Automatic condensate water evaporation [no need to empty drip trays]
- Supplied with 2m long power cord and 13amp plug [13A 230v 50Hz]

## Options:

- Various illuminated overhead gantry options
- Wide choice of coloured outer panels (durable plastic coated steel)
- Fold down solid tray slide or tubular tray rail
- Gastronorm adaptor 3 x 1/3 GN Size (Code: DGPA)
- Prep-shelf and cutting board (Codes: D2PS, D3PS, D4PS & D5PS)
- Rear sliding doors (Codes: D2DD, D3DD, D4DD & D5DD) Deli models only

## Note:


Low height models are available set at 800mm high. Ideal for children up to 12 years. These low height models have a "B" added to the model code.

## Optional solid tray slide

| Model | Matching unit size |
|-------|--------------------|
| VC2TS | 2                  |
| VC3TS | 3                  |
| VC4TS | 4                  |
| VC5TS | 5                  |

## Optional tubular tray rail

| Model | Matching unit size |
|-------|--------------------|
| VC2TR | 2                  |
| VC3TR | 3                  |
| VC4TR | 4                  |
| VC5TR | 5                  |

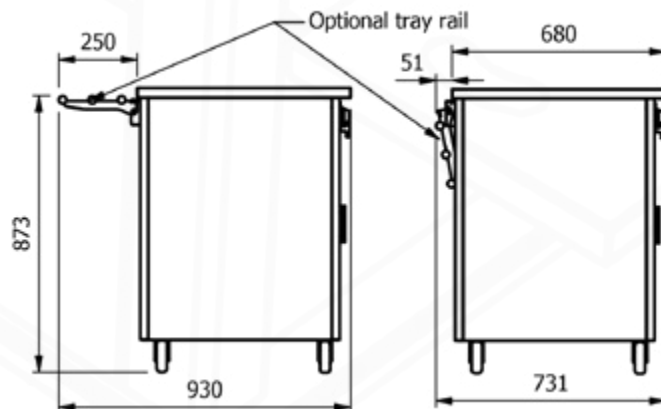



|                        | Model | GN 1/1 Capacity | Weight (kg) | L x W x H (mm)   | Electrical Supply | Power Rating (kw) | Rating with gantry (kw) |
|------------------------|-------|-----------------|-------------|------------------|-------------------|-------------------|-------------------------|
| Base Unit<br>No Gantry | VC2RW | 2               | 95          | 830 x 680 x 900  | 13amp             | 1.2               | 1.22                    |
|                        | VC3RW | 3               | 125         | 1158 x 680 x 900 | 13amp             | 1.2               | 1.23                    |
|                        | VC4RW | 4               | 155         | 1486 x 680 x 900 | 13amp             | 1.2               | 1.23                    |
|                        | VC5RW | 5               | 185         | 1814 x 680 x 900 | 13amp             | 1.5               | 1.53                    |

### Gantry options

Curved glass type, open or closed front with LED illuminated gantry

|  | Open Front | Closed Front | Height above top (mm) | Power Rating (kw) |
|--|------------|--------------|-----------------------|-------------------|
|  | VC2LG      | VC2LGF       | 405                   | 0.023             |
|  | VC3LG      | VC3LGF       | 405                   | 0.027             |
|  | VC4LG      | VC4LGF       | 405                   | 0.032             |
|  | VC5LG      | VC5LGF       | 405                   | 0.037             |

Square glass type, open or closed front with LED illuminated gantry

|  | Open Front | Closed Front | Height above top (mm) | Power Rating (kw) |
|--|------------|--------------|-----------------------|-------------------|
|  | VC2LGS     | VC2LGSF      | 405                   | 0.023             |
|  | VC3LGS     | VC3LGSF      | 405                   | 0.027             |
|  | VC4LGS     | VC4LGSF      | 405                   | 0.032             |
|  | VC5LGS     | VC5LGSF      | 405                   | 0.037             |

Deli curved or square glass type, closed front with LED illuminated gantry [Note: the shelf is not chilled]

|  | Open Front | Closed Front | Height above top (mm) | Power Rating (kw) |
|--|------------|--------------|-----------------------|-------------------|
|  | VC2LGD     | VC2LGDSL     | 538                   | 0.023             |
|  | VC3LGD     | VC3LGDSL     | 538                   | 0.027             |
|  | VC4LGD     | VC4LGDSL     | 538                   | 0.032             |
|  | VC5LGD     | VC5LGDSL     | 538                   | 0.037             |

Island curved or square glass type, with LED illuminated gantry

|  | Open Front | Closed Front | Height above top (mm) | Power Rating (kw) |
|--|------------|--------------|-----------------------|-------------------|
|  | VC2LGi     | VC2LGiSL     | 405                   | 0.023             |
|  | VC3LGi     | VC3LGiSL     | 405                   | 0.027             |
|  | VC4LGi     | VC4LGiSL     | 405                   | 0.032             |
|  | VC5LGi     | VC5LGiSL     | 405                   | 0.037             |



MADE IN BRITAIN

E&R Moffat Ltd.  
Bonnybridge  
FK4 2BS  
Scotland

Find us on:



1963 - 2018

www.ermoffat.co.uk  
+44 (0) 1324 812272  
sales@ermoffat.co.uk