



## OG8201/N - Lincat Opus 800 Natural Gas Counter-top Griddle - W 600 mm - 15.5 kW

Cooking a Full English Breakfast has never been easier than it is with the Opus 800 Gas Steel Griddle, which utilises a maximised cooking area.

- ✓ Maximised cooking area, griddle plates sit flush to the sides of the unit
- ✓ Two separately controlled heat zones give you the option of operating either zone independently to provide a smaller cooking area during quiet periods as well as offering versatility when cooking two separate meals simultaneously
- ✓ Flame failure protection
- ✓ Precise thermostatic control up to 280°C for consistent results and economical operation

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>BTU per Hour</b>	52,886
<b>Range</b>	Opus 800	<b>Total Power kW</b>	15.5
<b>Power Type</b>	Gas	<b>Temperature Range °C</b>	90-280
<b>Gas Type</b>	Natural Gas	<b>Cooking Area (Width x Depth) mm</b>	590 x 600
<b>Unit Type</b>	Counter-top	<b>Temperature Control</b>	Mechanical
<b>Available in UK Only</b>	No		
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105102656		

Key Specifications		Capacity	
<b>Number of Heat Zones</b>	2	<b>Product Output per Hour</b>	128 x 225g [8oz] steaks [chilled]
<b>Grill Plate Surface Type</b>	Smooth		
<b>Grill Plate Material</b>	Steel		

Weights and Dimensions		Supply Connections	
<b>Unit Height (External) mm</b>	532	<b>Requires Installation</b>	Yes
<b>Unit Width (External) mm</b>	600	<b>Requires Electrical Supply</b>	No
<b>Unit Depth (External) mm</b>	800	<b>Gas Connection BSP</b>	1/2"
<b>Net Weight Kg</b>	79.5	<b>Gas Consumption at full rate Natural m³ per Hour</b>	1.48
		<b>Gas Pressure Natural mbar</b>	20.0
		<b>Total heat input at full rate Natural kW</b>	15.5
		<b>Total heat input at full rate Natural BTU per hour</b>	15.5




Shipping	
<b>Packed Weight Kg</b>	87.45
<b>Packed Height cm</b>	63
<b>Packed Width cm</b>	70
<b>Packed Depth cm</b>	85

Available Accessories	
<b>CH01</b>	Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU
<b>CH02</b>	Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU
<b>OA8917</b>	Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm

Available Accessories

- OA8917/C Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm
- OA8972 Lincat Opus 800 Free-standing Pedestal with Doors and Legs - for units W 600 mm
- OA8972/C Lincat Opus 800 Free-standing Pedestal with Doors and Castors - for units W 600 mm

Technical Picture

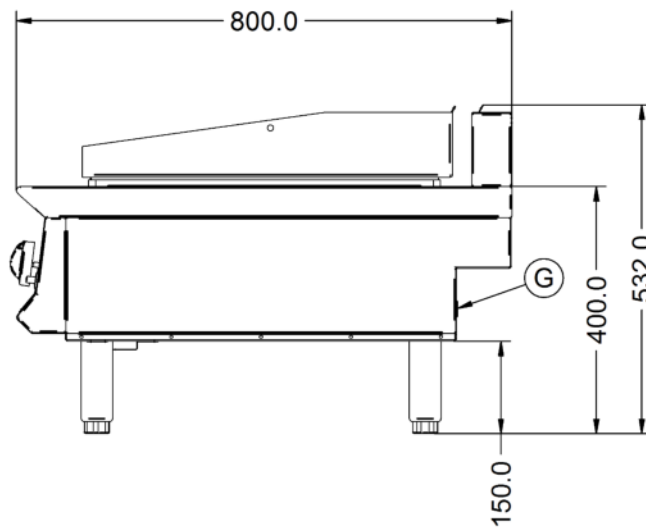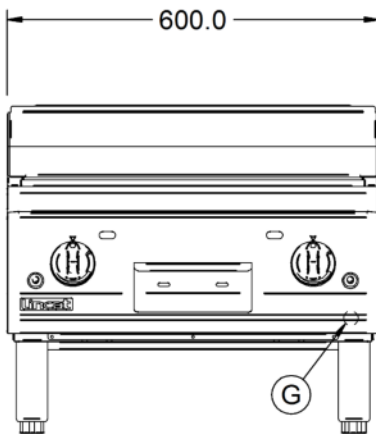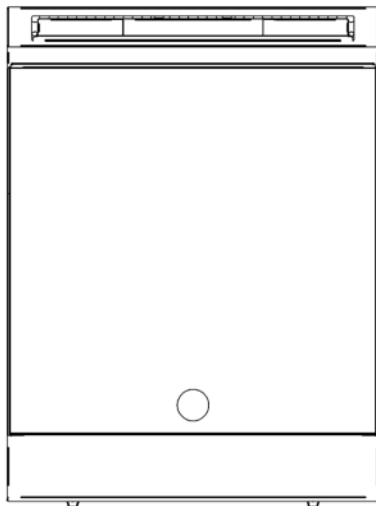



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm