



Glass Door Ventilated Gastronorm Refrigeration

2/1 Gastronorm Capacity

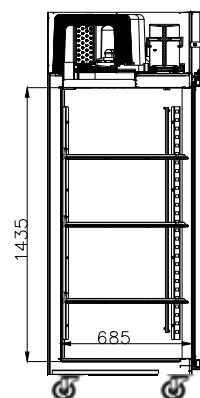

BL1SSCR

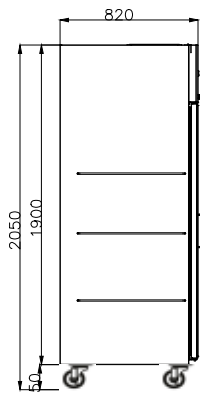

BH2SSCR

FEATURES

- Stainless steel exterior & interior
- Internal corners rounded to aid cleaning
- 4 adjustable shelves GN2/1 per door
- 75 mm thick energy efficient insulation
- Lock fitted as standard
- Heavy duty castors as standard
- LED lighting
- Replaceable door gasket

TECHNICAL SPECIFICATIONS

	BH models	BL models
Cooling:	Ventilated	
Controller:	Dixell controller	
Compressor:	Embraco compressors	
Defrost:	Automatic	
Refrigerant:	See below table	
Climate Class:	4	
Temperature Range:	+3°C ~ +10°C	-15°C ~ -20°C
Power Supply:	13amp	

MODEL	DOOR	GROSS CAPACITY	EXT. DIMENSIONS (H x W x D mm)	POWER CONSUMPTION	REFRIGERANT	DECIBELS	WEIGHT (kg)	RRP
BH1SSCR	1	550L	2050 x 700 x 820	350W	R290	48dBA	146	
BH2SSCR	2	1200L	2050 x 1400 x 820	560W	R134a	48dBA	210	
BL1SSCR	1	550L	2050 x 700 x 820	750W	R290	48dBA	161	
BL2SSCR	2	1200L	2050 x 1400 x 820	880W	R404a	48dBA	240	

