



Sirman Spa  
 Viale dell'Industria 9/11  
 35010 PIEVE DI CURTAROLO (PD), Italy  
 Tel./Fax. +39 049 9698666 / +39 049 9698688  
 email: info@sirman.com



Sirman Vacuum Packaging Machines , model W8 Top 30.40.50 :

- Extraordinary design reduces the footprint of the machine and improves comfort
  - Bell in great development of volume plexiglass thermoformed thick on mod. 50 and 70, injection in Tritan on mod. 30 and 40
  - easily removable sealing bar
  - Extremely easy to clean thanks to the perfect flatness of the support product plan.
  - Automatic lifting the lid by means of pneumatic pistons.
  - Surface for liquid bags
  - 5 mm thick, AISI 304 stainless steel, easy to clean plain vacuum chamber
  - Available in all sizes: 30, 40, 50 and 70
  - Practical and intuitive touch screen display
  - Electronic control system with pressure sensor for fast and precise processing
  - Adjustable automatic vacuum percentage: 50-100%
  - Dedicated programme for liquids
  - Dedicated programme for marinating
  - 10 different settings savable to preference
  - 6 selectable languages
  - Settable sealing, vacuum and gas time on a scale 1-10 sec.
  - Display of vacuum percentage and time to countdown
  - Scheduled management of maintenance operations to ensure longer-lasting life
  - oil and filter change warning light
  - Thermal pump guard
  - Oil preheat and cleaning cycle
  - Total rev counter
  - Pump meter
  - Built-in Wi-Fi card which allows careful management of after-sales service at a distance
  - 3-year pump warranty (for machines connected via Wi-Fi)
  - Fully manageable via APP that is easy and intuitive and can be downloaded free-of-charge from official stores
- Compatible with Industria 4.0**
- Optionals:**
- Hose for external suction
  - GN tanks for external suction
  - Plexiglass support
  - Inert gas system (MAP) and soft air
  - Automatic thermal printer by date, time and packing specifications
  - AOR



External suction hose optional



Optional table base for W8 50 without wheels



Single sealing bar



Double sealing bar W8 50 DB






Optional built-in printer




Optional inert gas and soft air

Data sheet



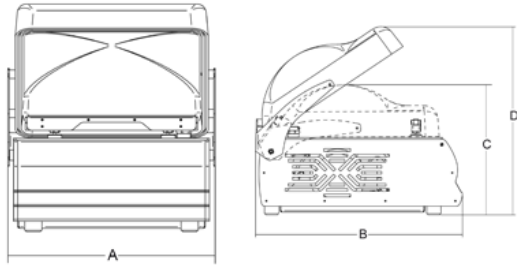

30-40-50



50 DB

Technical data

Model	W8 TOP 30	W8 TOP 30 - 12	W8 TOP 40	W8 TOP 50	W8 T
Power	kw 0,35	kw 0,45	kw 0,75	kw 0,75	kw 0,
Power source	1ph	1ph	1ph	1ph	1ph
Vacuum pump	8 mc/h	12 mc/h	21 mc/h	21 mc/h	21 mc
Sealing bar	mm 310	mm 310	mm 410	mm 510	mm 4
Cavity dimensions	mm 340x360 h.160	mm 340x360 h.160	mm 430x410 h.170	mm 545x460 h.190	mm 5
A	mm 402	mm 402	mm 493	mm 609	mm 6
B	mm 525	mm 525	mm 585	mm 640	mm 6
C	mm 408	mm 408	mm 422	mm 420	mm 4
D	mm 587	mm 587	mm 630	mm 605	mm 6
E	mm 334	mm 334	mm 390	mm 430	mm 4
F	mm 340	mm 340	mm 430	mm 540	mm 4
G	mm 95	mm 95	mm 99	mm 90	mm 9
H	mm 170	mm 170	mm 180	mm 210	mm 2
Net weight	kg 38	kg 38	kg 56	kg 70	kg 75
Shipping	mm720x570x770	mm 720x570x770	mm 760x640x770	mm 840x870x750	mm 8
Net weight	kg 48	kg 48	kg 66	kg 86	kg 87
HS-CODE	84224000				