



G9181 Gas Solid Top Range



Short Form Specification

Unit to be Falcon F900 Series gas solid top range having a 10.3kW central gas burner and a 2/1 GN gas oven below with 5 shelf positions to be supplied upon adjustable feet. Burner with flame failure device as standard to guard

The cooking surface will be made from cast iron and will be in sections to allow removal for ease of cleaning. The cast iron cooking surface will be flush with lateral units and front hob to create a plating area.

The hob will be constructed from 2mm 304 grade stainless steel. Hobs will be laser cut with right-angled edges to allow joining of units with no gaps between hobs. Exterior panels are Scotch Brite finish stainless steel. Control knobs to be marked showing gas positions and to have a bezel behind each knob to prevent water ingress.

Oven to be 2/1 GN compatible on runners with five levels of runners allowing three shelf cooking.

Unit will be for use with natural, propane or butane gas and be supplied with conversion kit.

Key Features

- High performance 10.3kW cast iron burner
- Cast iron hob plates
- Flush hob provides increased work area
- Central burner delivers graduated heat
- Burner fitted with flame failure device as standard
- Fully-pressed oven door seal
- 2/1 GN oven with side-mounted runners
- 5 shelf positions, 2 shelves supplied
- 80 - 280°C oven temperature range
- 2mm thick 304 grade stainless steel hob
- Laser cut hob allows edge to edge joining of units
- Stainless steel external panels with Scotch Brite finish
- For use with natural, propane and butane gas. Conversion kit supplied with each unit
- Dynamic Link System Compatible



Integrated linking system allows quick and easy installation to create a continuous cookline.


UK Patent No. 2540131

Optional Accessories

- Front hob rail
- Side cover panel
- Kick plate
- Castors

G9181 Gas Solid Top Range

Model Dimensions (mm)

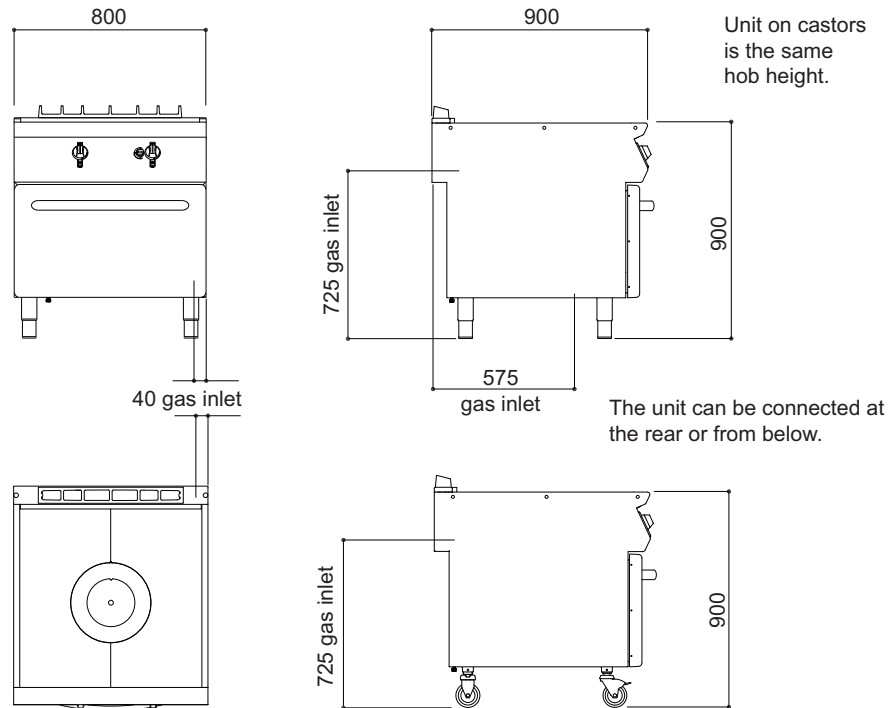

Specification Details

	Natural Gas	Propane Gas	Butane Gas
Total rating (kW - Nett)	17.8	17.3	17.3
Total rating (btu/hr - gross)	66,826	64,949	64,949
Inlet size	3/4" BSP	3/4" BSP	3/4" BSP
Flow rate	1.75m ³ /hr	1.258kg/h	1.237kg/h
Inlet pressure (mbar)	20	37	29
Operating pressure (mbar)	15	37	29
Hob burner rating (kW - Nett)	10.3	10.3	10.3
Hob burner rating (btu/hr - gross)	38,669	38,669	38,669
Oven burner rating (kW - Nett)	7.5	7	7
Oven burner rating (btu/hr - gross)	28,157	26,280	26,280
Weight (kg)	155	155	155
Packed weight (kg)	171	171	171
Packed dimensions (mm)	850 (w) x 970 (d) x 1105 (h)		

Installation Note:

Please consult local legislation with regard to installation of cooking equipment.